

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number
WO 2004/058534 A1

(51) International Patent Classification⁷: **B60K 41/06**,
F16H 61/02, F02D 21/08

(74) Agent: ALBIHNS STOCKHOLM AB; P O Box 5581,
S-114 85 STOCKHOLM (SE).

(21) International Application Number:
PCT/SE2003/002059

(22) International Filing Date:
22 December 2003 (22.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0203893-3 30 December 2002 (30.12.2002) SE

(71) Applicant (for all designated States except US): VOLVO
LASTVAGNAR AB [SE/SE]; S-405 08 GÖTEBORG
(SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BERGLUND,
Sixten [SE/SE]; Björkstigen 7, S-423 54 TORSLANDA
(SE). ERIKSSON, Anders [SE/SE]; Lövskogsgatan 14,
S-413 20 GÖTEBORG (SE). STEÉN, Marcus [SE/SE];
Fotbollsvägen 31, S-424 33 ANGERED (SE). UDD,
Sören [SE/SE]; Pilörtsvägen 3, S-440 45 NÖDINGE (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF REGULATING EGR IN AN INTERNAL COMBUSTION ENGINE AND VEHICLE WITH AN EN-
GINE WITH ELECTRONIC MEANS FOR APPLYING THE METHOD

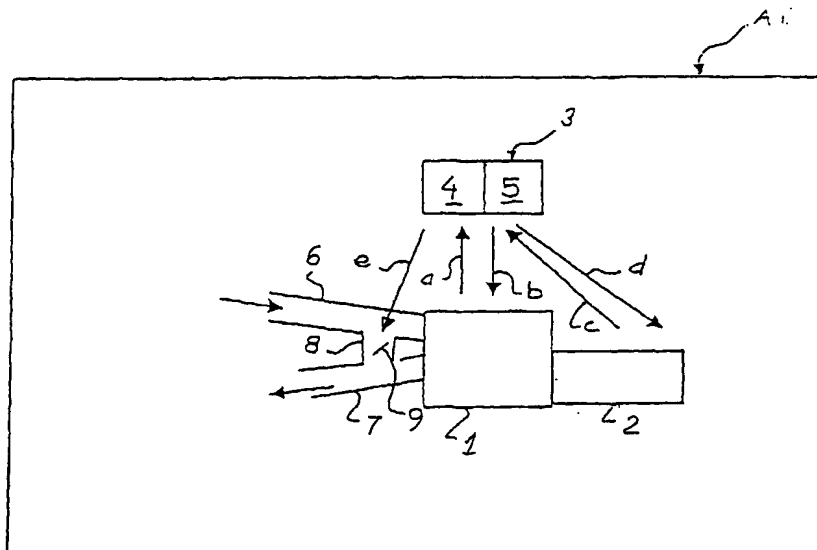

(57) Abstract: Vehicle (A) with an internal combustion engine (1), an automated transmission (2) coupled to the engine, and elec-
tronic control means (3) which control the supply of fuel to the engine combustion chambers and recirculation of exhaust from the
engine exhaust side (7) to its intake side (6). The control means are disposed to compute, while the vehicle is moving, future driving
resistance and the time until a future shifting between gears and to control valve means (9) which regulate exhaust return flow during
this time to optimize fuel consumption and emissions, when the gearshifting takes place.

WO 2004/058534 A1

1/1/PR

Method of regulating EGR in an internal combustion engine and vehicle with an engine with electronic means for applying the method.

5 The present invention relates to a method of regulating, in an internal combustion engine in a moving vehicle, the recirculation of exhaust from the exhaust side of the engine to the intake side of the engine.

10 The invention also relates to a vehicle with an internal combustion engine with electronic control means, which control the supply of fuel to the engine combustion chambers and recirculation of exhaust from the engine exhaust side to the engine intake side.

15 During engine operation, it is generally known to continuously control, by means of the engine control unit via regulator valve means in a conduit between the engine exhaust conduit and the engine intake conduit, the amount of recirculated exhaust in relation to the engine operating conditions, so that the best fuel consumption is maintained at the same time as response and low emission requirements are fulfilled. This controlling is, however, momentary and intrareferential, which means that it cannot predict and take into account transients in the engine operating state. Such transients are, for example, 20 shifting in the vehicle gearbox or momentary throttle opening on an uphill incline after driving with torque reduction and engine braking in a downhill incline. When driving with exhaust recirculation, for example, smoke can appear from the engine exhaust pipe in connection with the torque reduction when shifting. Smoke is produced due to the fact that the closing of the recirculation valve initiated by the transient occurs so late that 25 there is a volume of exhaust remaining in the intake manifold, which is drawn into the engine combustion chambers and results in increased particle emissions. This takes the form of smoke.

The purpose of the present invention is to achieve a method of controlling the exhaust recirculation so that it can also be adapted to future events instead of being limited as today to control which is momentary and intrareferential in the engine.

5 This is achieved according to the invention by virtue of the fact that the future driving resistance of the vehicle is calculated, that the time until a future transient in the engine operating state is calculated and that the exhaust return flow is regulated during this time to optimize fuel consumption and emissions when the transient takes place.

10 This method can avoid, for example, the production of smoke when shifting, by closing the recirculation valve ahead of time so that the intake system has time to be emptied of exhaust prior to throttle closing when shifting.

The invention is based on the control means having information on when a future
15 shifting of gears is to take place. This information is based on information on the future changes in vehicle driving resistance. The invention is based on the technology which is described in WO 03/041988. The control unit is in this case disposed to select, with stored parameters and thus knowledge of at least road incline and throttle position (which also can include engine, turbo charger and transmission characteristics), when a future
20 shifting of gears is to take place according to a selected shift strategy. Information on future driving resistance can in this case be obtained with the aid of GPS equipment and electronic maps with stored information on the surrounding topography. Reference is made to the above mentioned patent publication for a more detailed description of the selection of a future gearshift scheme which is optimum with reference to a selected
25 criterion.

A motor vehicle of the type described by way of introduction is characterized according to the invention in that control means are disposed to calculate, while the vehicle is moving, on the basis of at least road incline and throttle position, future driving
30 resistance and the time until a future transient in the engine operating state, and to control

the exhaust return flow by regulating valve means during this time to optimize fuel consumption and emissions when the transient takes place.

The invention will be described in more detail below with reference to examples shown in the accompanying drawing, where Fig. 1 shows a schematic representation of a drive unit for a vehicle, and Fig. 2 shows a diagram of a simulation of a moving vehicle.

The drive unit shown in Fig. 1 in a motor vehicle A comprises an internal combustion engine 1, which is driven by an automated transmission 2. The engine 1 and the transmission 2 are controlled by an electronic control unit 3 comprising an engine control portion 4 and a transmission control portion 5 which communicate with each other. The control can be effected in accordance with the model which is described in the above mentioned WO 03/041988 and which is symbolized by the arrows "a" and "b" for engine control, and "c" and "d" for transmission control.

6 designates an intake conduit to the engine combustion chambers and 7 indicates an exhaust conduit from the engine combustion chambers. The conduits 6 and 7 communicate with each other via conduit 8 through which exhaust in the conduit 7 can be recirculated to the intake conduit 6. In the conduit 8, there is a valve 9 (the EGR valve) by means of which the volume of recirculated exhaust can be controlled continuously between zero (closed valve) and a predetermined maximum value per unit of time. The valve 9 is controlled, as symbolized by the arrow "e" in a known manner by the control unit 3 continuously during the operation of the engine in relation to engine operating conditions, so that the best fuel consumption is always obtained at the same time as the requirements of low particle and NO_x emissions are fulfilled.

The forward motion of the vehicle is recorded in the control unit 3 in the form of increasing engine rpm as a function of time, which is marked in Fig. 2 with a solid curve "f". With information on accelerator pedal position and information from the GPS equipment, for example, with electronic topographical maps, there can be simulated the

future driving resistance and the time from a current rpm to an rpm at which the next gearshifting in the transmission is estimated to take place. This is marked with a dotted extension "g" of the curve "f". For a detailed description of how the vehicle driving can be simulated on the basis of a model, reference is made to the above mentioned WO 03/041988.

Within the time period marked in Fig. 2 from the current engine rpm to the rpm for the next gearshift, the control unit 3 regulates the EGR valve 8 towards its closed position, so that the engine intake conduits 6 are emptied of recirculated exhaust volumes when the control unit 3 reduces the engine torque and initiates gearshift. In this manner, an override function is obtained which takes over the momentary intrareferential engine control of the recirculation of exhaust to the intake side of the engine.

Other future transients in the engine operating state than shifting of gears and which can be computed in the above described manner are, for example, torque reduction when the vehicle approaches the crest of a hill, and torque increase after the end of a downhill incline.

Claims

1. Method of regulating, in an internal combustion engine (1) in a moving vehicle (A), the recirculation of exhaust from the exhaust side (7) of the engine to the intake side (6) of the engine, **characterized** in that the future driving resistance of the vehicle (A) is calculated, that the time until a future transient in the engine operating state is calculated, and that the exhaust return flow is regulated during this time to optimize fuel consumption and emissions, when the transient takes place.
2. Method according to claim 1 for regulating return exhaust flow in connection with gearshifting in an automated transmission (2) coupled to the engine (1), **characterized** in that the time until a future shifting between gears is calculated, and that the exhaust return flow during this time is restricted to optimize fuel consumption and emissions during the shifting between gears.
3. Vehicle with an internal combustion engine (1) with electronic control means (3) which control the supply of fuel to the engine combustion chambers and recirculation of exhaust from the exhaust side (7) of the engine to the engine intake side (6), **characterized** in that the control means (3) are disposed, while the vehicle is moving, on the basis of input information on at least road incline and throttle position, to calculate future driving resistance and the time until a future transient in the engine operating state, and to control the exhaust return flow by regulating valve means (9) during this time to optimize fuel consumption and emissions when the transient takes place.
4. Vehicle according to claim 3 with an automated transmission (2) coupled to the engine (1), **characterized** in that the control means (3) have engine and transmission control functions and are disposed to calculate the time until a future shifting of gears and control the exhaust return flow by regulating valve means (9) during this time to optimize fuel consumption and emissions during the gearshifting.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/002059

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B60K 41/06, F16H 61/02, F02D 21/08
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B60K, F16H, F02D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6098005 A (TSUKAMOTO ET AL), 1 August 2000 (01.08.2000), abstract --	
A	EP 1201904 A2 (NISSAN MOTOR CO., LTD.), 2 May 2002 (02.05.2002), page 2, line 49 - line 54; page 9, line 53 - page 10, line 11, figure 1 --	
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 07, 29 September 2000 (2000-09-29) & JP 2000 110622 A (TOYOTA MOTOR CORP), 18 April 2000 (2000-04-18) abstract --	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 March 2004

Date of mailing of the international search report

11-03-2004

Name and mailing address of the ISA/
Swedish Patent Office.
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Dan Ionesco / MRo
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/002059**C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p data-bbox="308 378 1104 483">US 2002038647 A1 (TASHIRO ET AL), 4 April 2002 (04.04.2002), figure 1, paragraph (0061)-(0067), paragraph (0099)-(0102)</p> <p data-bbox="633 504 755 556">-- -----</p>	

INTERNATIONAL SEARCH REPORT

Information on patent family members

24/12/2003

International application No.

PCT/SE 2003/002059

US	6098005	A	01/08/2000	DE	19738747	A	05/03/1998
				JP	3171795	B	04/06/2001
				JP	10078119	A	24/03/1998

EP	1201904	A2	02/05/2002	JP	2002138872	A	17/05/2002

US	2002038647	A1	04/04/2002	DE	10148516	A	14/08/2002
				JP	2002180860	A	26/06/2002

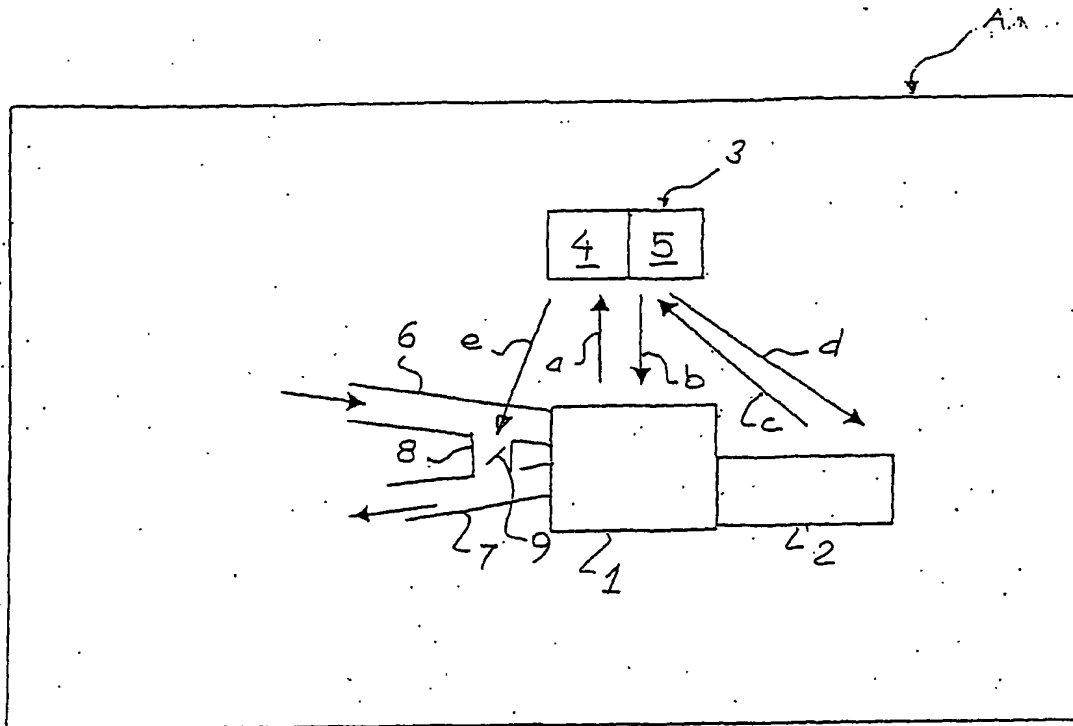


Fig. 1

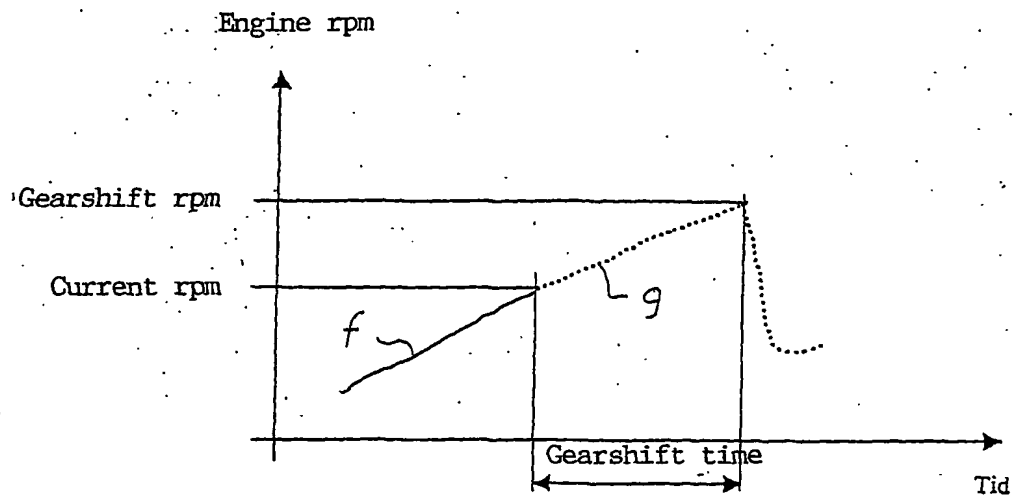


Fig. 2